



CONTACT

Quality Leader in
Truck Attachments

- Drum handlers
- Self powered attachments
- Lifting devices and booms
- Wide load handling
- Recycling containers
- Premises cleaning
- Fall prevention cages
- Truck forks



Contact Attachments
Mochdre Industrial Estate
Newtown
Powys
SY16 4LE

tel : 01686 611200
fax : 01686 611201

Tele-Liner Jib

The ideal solution for dedicated fork trucks lifting varying loads at varying load centres.





Use :-

An inexpensive jib which gives longer reach capabilities for picking up product which is difficult to palletise or for handling motors, press tools etc. from positions which are hard to access. Has the added feature of a mechanically extending inner section for extra reach. Supplied with two hooks which allow extra long loads to be carried in complete safety.

Model Ref.	Truck Capacity	'A' Hook Height	'B' Closed Length	'C' Open Length	'D' Fork Spread	'F' Max Fork Width	'E' Max Fork Thickness
LLX 500-1.8	2000 kg	339 mm	2000 mm	3000 mm	385 mm	125 mm	50 mm
LLX 500-1.8-BP	2000 kg	339 mm	2000 mm	3000 mm	482 mm	180 mm	90 mm
LLX 500-2.2	2500 kg	354 mm	2000 mm	3000 mm	385 mm	125 mm	50 mm
LLX 500-2.2-BP	2500 kg	354 mm	2000 mm	3000 mm	482 mm	180 mm	90 mm
LLX 500-2.7	3000 kg	364 mm	2000 mm	3000 mm	520 mm	150 mm	50 mm
LLX 500-2.7-BP	3000 kg	364 mm	2000 mm	3000 mm	556 mm	180 mm	90 mm
LLX 500-3.1	3500 kg	364 mm	2000 mm	3000 mm	520 mm	150 mm	50 mm
LLX 500-3.1-BP	3500 kg	364 mm	2000 mm	3000 mm	556 mm	180 mm	90 mm
LLX 500-3.5	4000 kg	414 mm	2000 mm	3000 mm	520 mm	150 mm	50 mm
LLX 500-3.5-BP	4000 kg	414 mm	2000 mm	3000 mm	556 mm	180 mm	90 mm
LLX 500-4.4	5000 kg	432 mm	2000 mm	3000 mm	530 mm	150 mm	50 mm
LLX 500-4.4-BP	5000 kg	432 mm	2000 mm	3000 mm	556 mm	180 mm	90 mm

Model Ref.	Weight	C of G Min	C of G Max
LLX 500-1.8	124 kg	763 mm	960 mm
LLX 500-1.8-BP	140 kg	735 mm	900 mm
LLX 500-2.2	124 kg	763 mm	960 mm
LLX 500-2.2-BP	140 kg	735 mm	900 mm
LLX 500-2.7	220 kg	795 mm	985 mm
LLX 500-2.7-BP	240 kg	735 mm	930 mm
LLX 500-3.1	220 kg	795 mm	985 mm
LLX 500-3.1-BP	240 kg	755 mm	930 mm
LLX 500-3.5	222 kg	795 mm	985 mm
LLX 500-3.5-BP	245 kg	760 mm	935 mm
LLX 500-4.4	234 kg	821 mm	995 mm
LLX 500-4.4-BP	245 kg	760 mm	935 mm

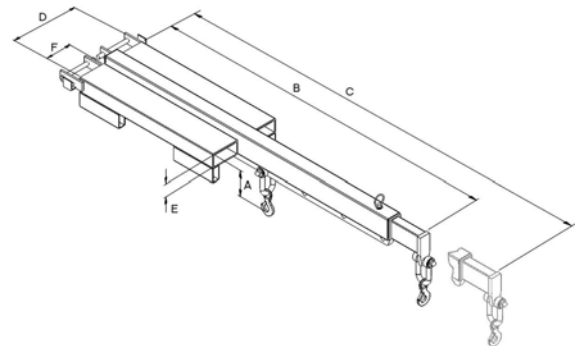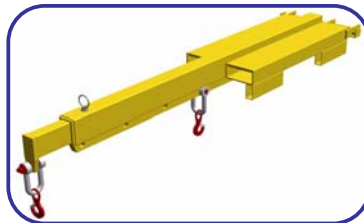

		Capacity (kg) at Load Centers (mm) shown										
Model Ref.	Truck Capacity	500	750	1000	1250	1500	1750	2000	2250	2500	2750	3000
500-1.8	2000 kg	1800	1400	1100	900	720	580	500	360	330	260	210
500-2.2	2500 kg	2200	1800	1400	1100	1000	850	750	560	440	320	230
500-2.7	2700 kg	2700	2050	1450	1200	1100	900	840	670	490	360	270
500-3.1	3500 kg	3100	2500	1900	1500	1200	1000	900	730	580	450	370
500-3.5	4000 kg	3500	2700	2000	1600	1300	1100	1000	820	670	540	460
500-4.4	5000 kg	4400	3400	2700	2200	1850	1400	1100	900	750	620	500

Ordering Information :-

Truck Capacity?
Fork Width, Thickness and Length?
Details of load to be handled?
Max Fork Spread?

www.forklift-attachments.co.uk
email : sales@forklift-attachments.co.uk

Freephone
0800
028 3332

Call now for your personal
quote and further info

